

High Packing Density



MBR – MEMBRANE BIOREACTOR
HOLLOW FIBRE MEMBRANE
HYPER™ PVDF
HMBR-MB25



Overview

MEGAVISION HMBR PVDF Series, is a high-quality reinforced Hollow Fibre MBR membrane optimized for small to large flux wastewater treatment plants.

Structured with Hyper™ PVDF (permanently hydrophilic polyvinyl difluoride) has **the advantage of dry storage**.

FMBR PVDF Series membranes can be used for a wide variety of treatment applications such as industrial and domestic wastewaters.

- Permanently hydrophilic
- High chlorine tolerance
- Backwashable membrane

Product Specifications


Effective membrane area	m ²	25
Dimensions (w×h×d)	mm	1,240x2,000x30
Weight	Kg	14.5
ID/OD	mm	2.0 / 2.5
Nominal pore size	µm	0.2
Membrane material		PET tube + Hyper™ PVDF

Product Performances

Storage & Maintenance	Dry Storage
Design flux rate	10~20 L/m ² .h
MLSS	4,000~12,000 mg/L

Operating Specifications

Operating temperature	5~40 °C
DO concentration	>1 mg/L
pH range	2~11
Operating pressure	-0.01~0 MPa
Max. operating pressure	0.03 MPa
Max. pressure drop	0.02 MPa
Max. backwash pressure	0.2 MPa

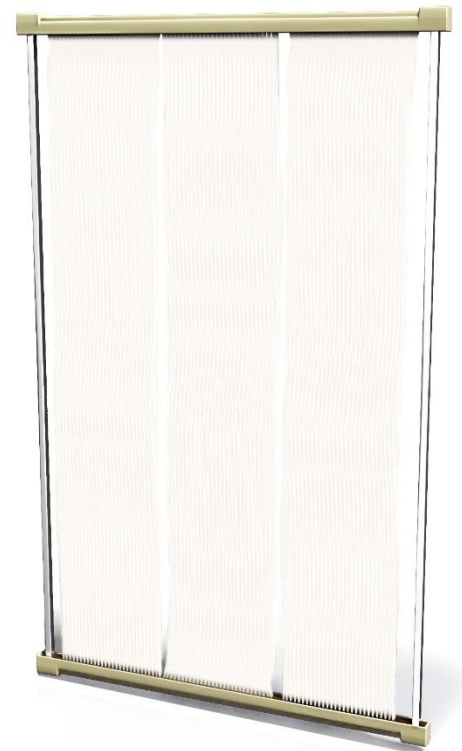

The information and data contained herein are deemed to be accurate and reliable and are offered in good faith, but without guarantee of performance. MegaVision membrane assumes no liability for results obtained or damages incurred through the application of the information contained herein. Customer is responsible for determining whether the products and information presented herein are appropriate for the customer's use and for ensuring that customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Specifications subject to change without notice. MegaVision Membrane is registered brand of Shanghai MegaVision Membrane Technology & Engineering Co. Ltd. All rights reserved © 2019.